

Specifications

MODELS	GS™-2668 RT		GS™-3268 RT	
MEASUREMENTS	US	Metric	US	Metric
Working height*	32 ft	9.92 m	38 ft	11.75 m
A Platform height	26 ft	7.92 m	32 ft	9.75 m
B Platform length - outside	8 ft 3 in	2.51 m	8 ft 3 in	2.51 m
extended	13 ft	3.96 m	13 ft	3.96 m
C Platform width - outside	5 ft 1 in	1.55 m	5 ft 1 in	1.55 m
platform extended	5 ft	1.52 m	5 ft	1.52 m
Toeboard height	6 in	.15 m	6 in	.15 m
Platform height - stowed	3 ft 10.75 in	1.19 m	4 ft 3.75 in	1.31 m
D Height - stowed**	7 ft 7.5 in	2.32 m	8 ft 5 in	2.45 m
rails lowered	5 ft 7 in	1.70 m	6 ft	1.83 m
E Length - stowed	8 ft 9 in	2.67 m	8 ft 9 in	2.67 m
platform extended	13 ft 5.5 in	4.10 m	13 ft 5.5 in	4.10 m
with outriggers	10 ft 9 in	3.28 m	10 ft 9 in	3.28 m
F Width	5 ft 8 in	1.73 m	5 ft 8 in	1.73 m
G Wheelbase	6 ft 1 in	1.85 m	6 ft 1 in	1.85 m
H Ground clearance - center	7.5 in	.19 m	7.5 in	.19 m

PRODUCTIVITY

Lift capacity	1,250 lbs	567 kg	1,000 lbs	454 kg
Extension deck capacity	300 lbs	136 kg	300 lbs	136 kg
Drive speed - stowed	3.8 mph	6.1 km/h	3.8 mph	6.1 km/h
Drive speed - raised	0.5 mph	0.8 km/h	0.5 mph	0.8 km/h
Gradeability***	40%		35%	
Maximum outrigger leveling:				
front to back	6.6%		6.6%	
side to side	10.6%		10.6%	
Turning radius - inside	5 ft	1.52 m	5 ft	1.52 m
Turning radius - outside	12 ft 1 in	3.68 m	12 ft 1 in	3.68 m
Raise/lower speed	30/35 sec		40/37 sec	
Controls	proportional		proportional	
Drive	dual front wheel		dual front wheel	
Multiple disc brakes	dual rear wheel		dual rear wheel	
Tires - rough terrain	12 x 23.5 in	30 x 60 cm	12 x 23.5 in	30 x 60 cm
Tires - low profile turf	12.5 x 22 in	32 x 56 cm	12.5 x 22 in	32 x 56 cm
Tires - non-marking	9 x 21.5 in	23 x 55 cm	9 x 21.5 in	23 x 55 cm

POWER

Power source	Kubota gas/LPG 23 hp (17 kW) Kubota diesel 20 hp (15 kW) Kubota diesel 26 hp (19 kW)	Kubota gas/LPG 23 hp (17 kW) Kubota diesel 20 hp (15 kW) Kubota diesel 26 hp (19 kW)
Auxiliary power unit	12 V DC	12 V DC
Fuel tank capacity	15 gal	15 gal
Hydraulic system capacity	56.8 L	56.8 L
	16.5 gal	16.5 gal
	62.5 L	62.5 L




WEIGHT****

	6,373 lbs	2,891 kg	8,008 lbs	3,632 kg
--	-----------	----------	-----------	----------

STANDARDS COMPLIANCE

ANSI A92.6, CSA B354.2, CE Compliance, AS 1418.10

* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.
 ** Based on RT tires; deduct 2 in (5.8 cm) for turf and non-marking tires.
 *** Gradeability applies to driving on slopes. See operator's manual for details regarding slope ratings.
 **** Weight varies depending on options and country standards.

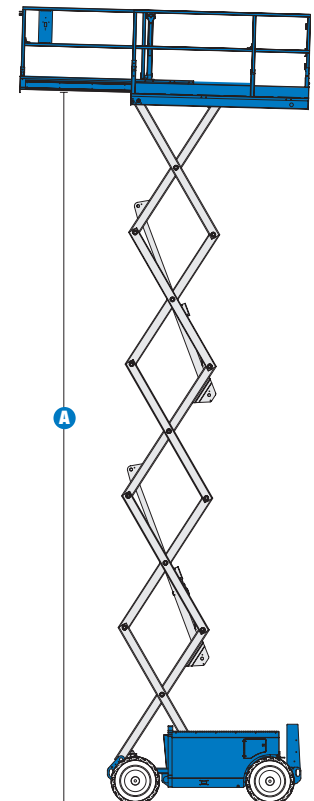

Features

EASILY CONFIGURED TO MEET YOUR NEEDS

PLATFORM

- Steel 8 ft 3 in (2.51 m) x 5.1 ft (1.55 m) platform (standard)
- Extension platform 5 ft (1.52 m)

POWER OPTIONS

- Kubota gas/LPG 23 hp (17 kW)
- Kubota diesel 20 hp (15 kW)
- Perkins diesel 26 hp (19 kW)

DRIVE

- 4WD

TIRE OPTIONS

- Foam-filled rough terrain tires
- Non-marking rough terrain tires

STANDARD FEATURES

MEASUREMENTS

GS™-2668RT

- 32 ft (9.92 m) working height
- Up to 1,250 lb (567 kg) lift capacity

GS™-3268RT

- 38 ft (11.75 m) working height
- Up to 1,000 lb (454 kg) lift capacity

PRODUCTIVITY

- Proportional lift and drive
- Onboard diagnostic system
- Folding guardrails
- Full height swing gate
- AC power to platform
- Electric horn
- Tilt sensor with audible alarm
- Descent alarm
- Hour meter
- 4WD
- Swing-out engine tray
- Dual-wheel disc brakes
- Brake release
- Foam-filled rough terrain tires

POWER

- 12 V DC auxiliary power



OPTIONS & ACCESSORIES

PRODUCTIVITY

- Automatic leveling hydraulic outriggers
- Air line to platform
- Platform work lights
- Pipe cradle (pair)
- Dual flashing beacons
- Motion alarm
- Non-marking rough terrain tires

POWER

- 2000 watt generator (110 V/60 Hz)
- Cold start packages for all engines
- Hydraulic oil cooler
- LPG steel tank only, 33.5 lb capacity
- Additional LPG tank and carrier

Genie United States

18340 NE 76th Street
P.O. Box 97030
Redmond, Washington 98073-9730

Telephone **(425) 881-1800**
Toll Free in USA/Canada **800-536-1800**
Fax (425) 883-3475

Genie Europe

The Maltings
Wharf Road
Grantham NG31 6BH
U.K.

Telephone **+44 (0)1476 584333**
Fax +44 (0)1476 584334

Email: infoeurope@genieind.com

Distributed By:

For further information, please contact your local distributor or the Genie Industries sales office listed. Continuous improvement of our products is a Genie policy. Product specifications are subject to change without notice or obligation. The photographs and drawings in this brochure are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. Prices and specifications subject to change without notice. The only warranty applicable is the standard written warranty applicable to the particular product and sale. Genie makes no other warranty, expressed or implied. Products and services listed may be trademarks, service marks or trade-names of TEREX Corporation and/or its subsidiaries in the USA and other countries and all rights are reserved. Copyright © 2005 Genie Industries, Inc. "Genie" is a Registered Trademark of Genie Industries, Inc. in the USA and many other countries. Genie is a TEREX Company.